

# Stadium Perimeter LED Display Unit



Angle Adjustable



High Refresh Rate



Power Sharing Technology



High Brightness






Adjustable Brightness



Silicone Soft Mask

## Cabinet Drawing

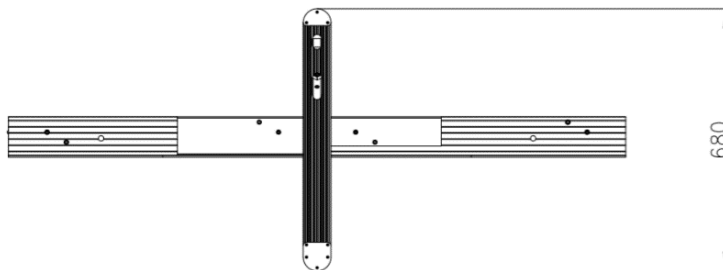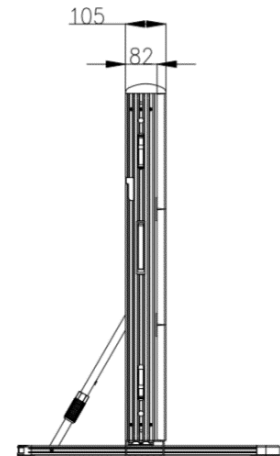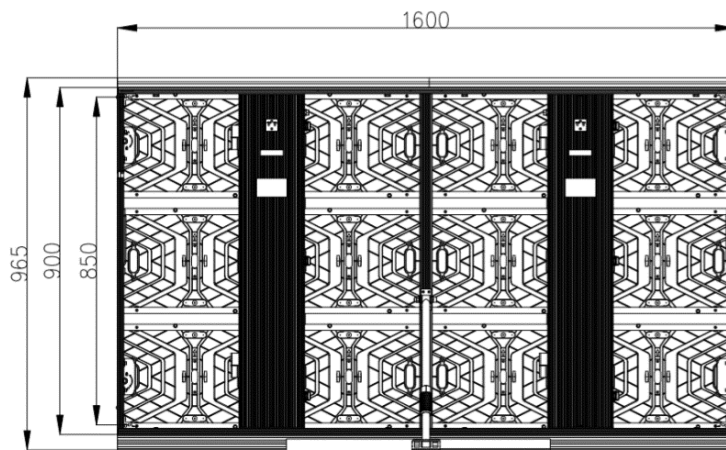

Cabinet Drawing

---

## Main Technical Specifications

Parameter	Value
Pixel Pitch	10mm
Brightness	6000cd/m <sup>2</sup>
Pixel Density	10000pixels/m <sup>2</sup>
Pixels Per Panel	160x90 Dots
Module Size	W400mmxH300mmxD24mm
Panel Size	W1600mm *H900mm *D105mm
Material	Aluminum
Weight	39kg/m <sup>2</sup>
Maintenance	Rear
Ingress Protection	IP65
Environment	Outdoor
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2000-9300K Adjustable
Horizontal Viewing Angle	150°
Vertical Viewing Angle	110°
Contrast Ratio	6000:1
Input Power <Max>	650W/m <sup>2</sup>
Input Power <Typical>	217W/m <sup>2</sup>
Input Voltage	100~240VAC
Processing Depth	15bit
Refresh Rate	≥7680 Hz
Video Frame Rate	50/60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20℃~+50℃/10~90%RH
Storage Temperature/Humidity	-30℃~+60℃/10~90%RH
Standard Mounting Configuration	Fixed

Note: Specifications are for reference only and are subject to change without notice.

Power consumption tolerance: ±15%, according to the actual situation.

---